

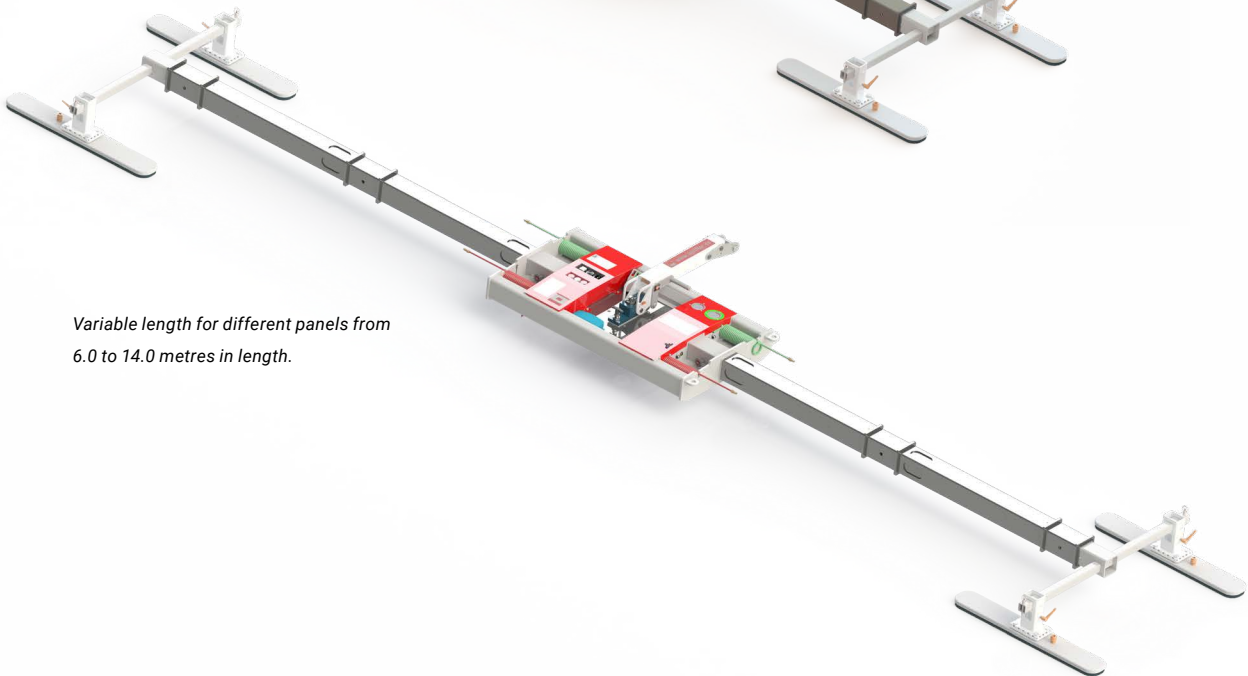


UPP400

Vacuum cups | Panel vacuum cups

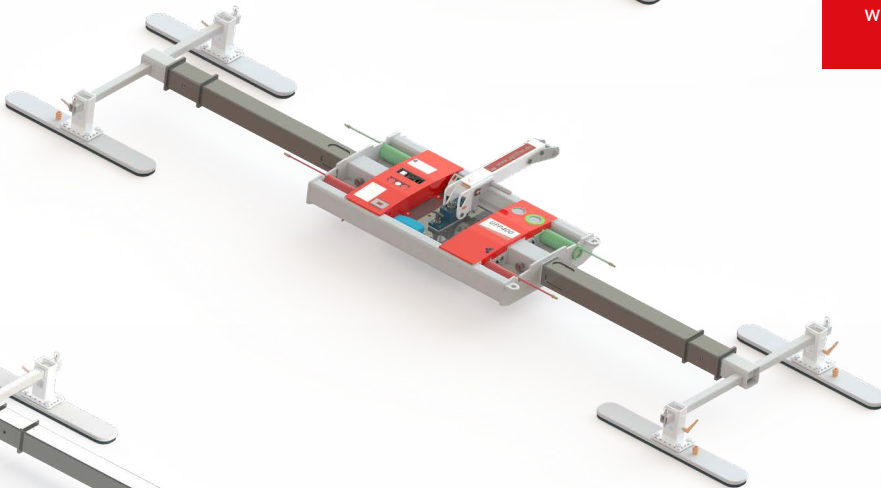

- Load capacity: horizontal **400 kg**
(vertical 200 kg, vertical 400 kg also possible with optional suction plates)
- Suction plates with spring-loaded plunger
- Manual rotation through 360° with grid every 30°
- Manual swivel without grid
- Two independent vacuum circuits with 2-fold safety
- Integrated measuring devices for monitoring
- Acoustic warning device
- Individual suction cup arrangement without tools
- Mains-independent 12 V battery power supply
- Extension arms for long panels
- Meets the requirements of DIN EN 13155

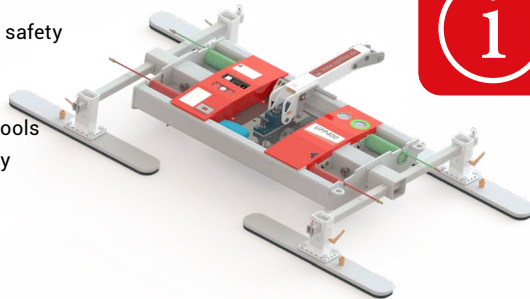

Variable length for different panels from
6.0 to 14.0 metres in length.



Uplifter GmbH & Co.KG

Oberaich 5 | 92543 Guteneck
Germany

T +49 9433 204990

www.uplifter.com



UPP400

Vacuum cups | Panel vacuum cups



Load capacity	400 kg (200 kg*)
Number of suction discs	4 Piece
Panel length	6,0 m/10,0 m/14,0 m
Tare weight*	100 kg/140 kg/180 kg
Packing dimensions	800 x 1,200 mm
Operating temperature	0 until 40°C
Operating time	8 h
Suction plate dimensions	120 x 800 mm

* depending on the body variant

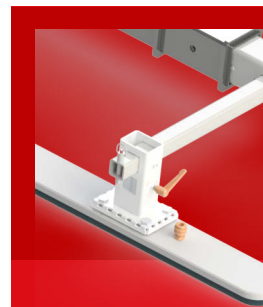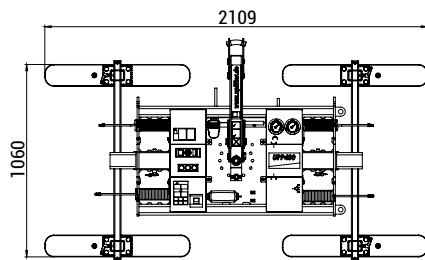

TIPP

The suction cups are infinitely adjustable to ensure the optimum position of the suction plates. Thanks to its foam rubber suction pads, even slightly textured surfaces are possible.

